

Power supply ZL-25-01

- ✓ Output power supply 2x24 V DC
- ✓ Maximum output current 2 × 50 mA
- ✓ Indication of presence of output voltage
- ✓ Permanently resistant to short circuits and excess voltage
- ✓ Casing can be fitted on a standard rail (TS35, TS32)



Applications and functions


The ZL-24-01 power supply is used with a 230 V, 50 Hz AC network supply to power devices requiring direct current (output voltage in the range 5 ÷ 30 V, standard value 24 V).

The product is available with two voltage DC output 2x24 V DC (2x50mA). To increase output current both channels should be parallel connected.

The ZL-25-01 is typically used to power devices requiring a 24 V DC power supply.

Technical parameters

| | |
|----------------------------------|---|
| Input voltage | 230 V, 50 Hz ($\pm 10\%$) |
| Output voltage | 2x24 VDC $\pm 1,2$ V DC (special versions: 5 ÷ 30 V) |
| Maximum load current | 2 × 50 mA |
| Galvanic separation | network transformer |
| Strength test parameters | 1,5 kVAC, 50 Hz, 1 min |
| Ambient temperature | 5...60°C |
| Ingress protection rating | IP20 |
| Weight | 0,4 kg |

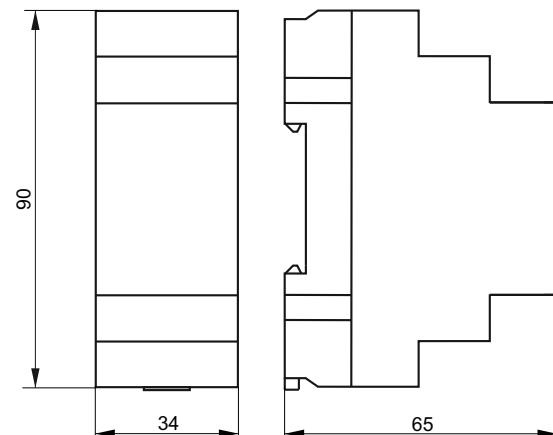

Ordering procedure

Standard version: **ZL-25-01**

Special version: **ZL-25-01/____/____**

Output voltage (value from 5 to 30 V)

Electrical diagrams

